


Unit Support

Rib Strapping

Rib Strapping for Underground use is available in any length

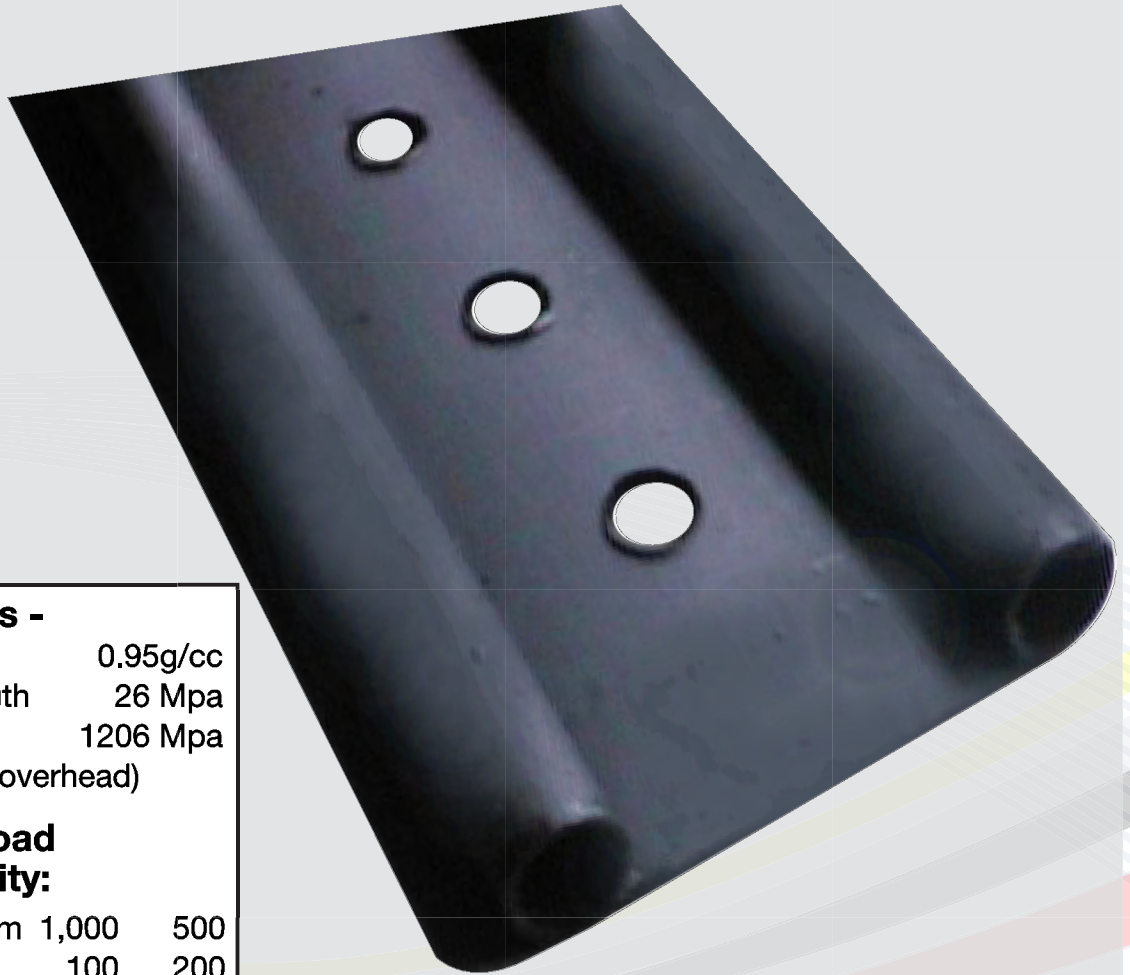

Resin Properties -

Density	0.95g/cc
Tensile Yield Strength	26 Mpa
Flexural Modulus	1206 Mpa
Simply Supported (overhead)	

Central Point Load

Ultimate Capacity:

Support Centres mm	1,000	500
Loading kg	100	200
Deflection mm	66	18

Section Properties: -

Profile Width	200 mm
Circle Diameter	40 mm
Circle Thickness	3 mm
Web Thickness	4 mm
Mass	1.27kg/m

